



Up to 1.2 kLux

Up to
3 meters

4 Wavelengths
and White


Backlight
version

High uniformity

Easy-to-use

Customizable
software

Built-in driver

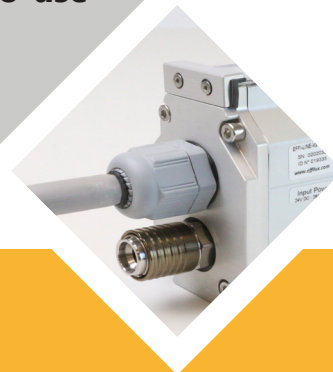


effiLINE3

Powerful bar light for linescan

PART NUMBER KEY

ILLUMINANCE VS WORKING DISTANCE

Standard version

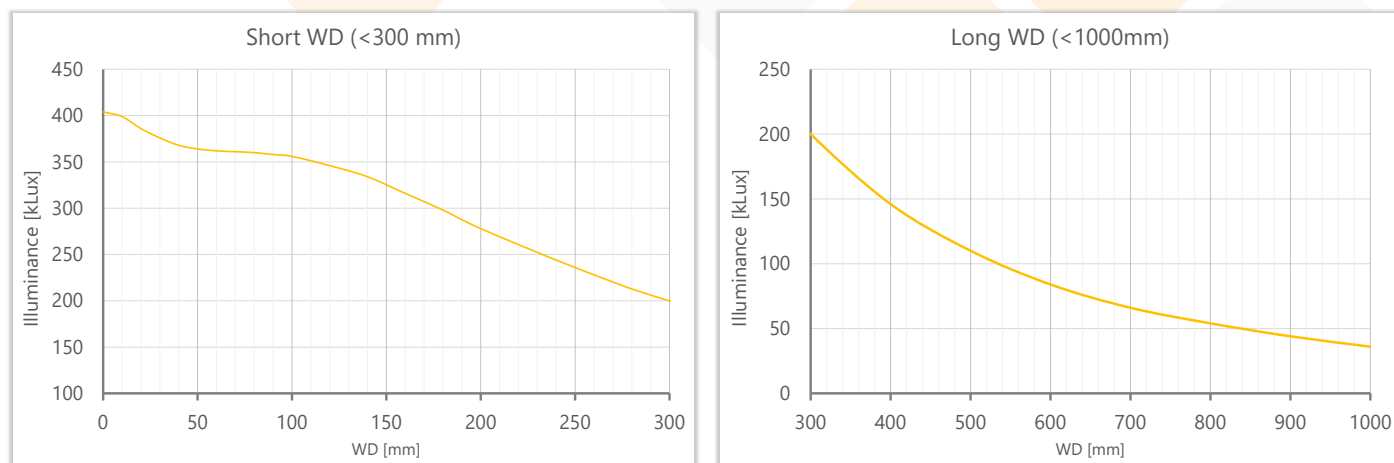


— White 5500K

Power version



When using the POWER version, multiply the value of the illuminance of the graphs by 3 to get the actual value.

IRRADIANCE PROFILE

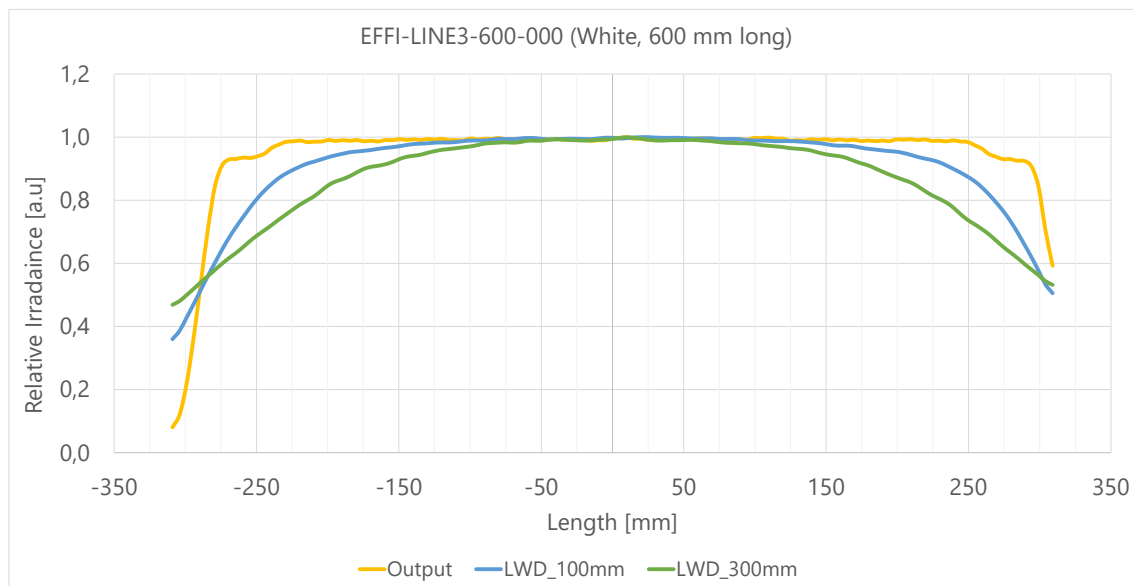

CONTACT INFORMATION

Please refer to the specific documentation (datasheet, user manual and drawing) for complementary information. Contents of this document are based on information available as of OCT-2022 and may be changed without prior notice.



EFFILUX
1, Rue de Terre Neuve
Mini Parc du Verger - Bâtiment E
91940 Les Ulis - FRANCE

Tel: +33 9 72 38 17 80
Fax: +33 9 72 11 21 69
Mail: sales@effilux.fr

Copyright 2022 Effilux - All rights Reserved